



Off-the-roll, continuous 45° fabric offering:

- Optimal Off-Axis Properties – Improved In-Plane Shear & Torsional Performance
 - Drapability for Compound Curvatures
- Reduced Waste & Labor – Cutting of 0/90° Fabric on the Bias is Eliminated

BIMAX-HH-52

Fabric: 2 x 2 Twill

Raw Material: Bias - Bias – T-700 SC 24K 50C (Toray) – 99% of weight

Axial – Fiberglass Stabilizing Yarns (every 4th position) – 1% of weight

Link to carbon fiber datasheet: <https://www.toraycma.com/page.php?id=661>

Fabric Width: 52"

Braid Angle: +/-45°

Braid Yield: 0.5 yd/lb (1.1 m/kg)

Areal Weight: 713 GSM

Layer Thickness (@55%FV): .03" (.72 mm)


Standard Fabric Tolerances

Yield Tolerance: +/-5%

Angle Tolerance: +/-3°

Standard Packaging on 6" Cores

Additional Quality Specifications available upon request

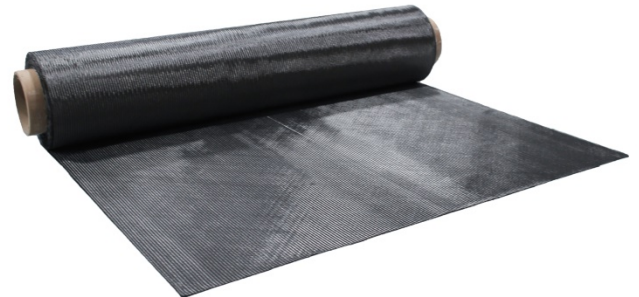

For more information, please visit www.braider.com, or contact a sales representative at sales@braider.com or 513-688-3200

All technical information and data contained herein is believed accurate and reliable. However, the accuracy and completeness of this information is not guaranteed and is subject to change without notice. A&P Technology shall not be liable for injury, loss or damage whether direct or consequential arising out of use of the data provided herein.