

ZERO[®]

No crimp, unidirectional fabric:

- Direct translation of properties
- Highly efficient and very affordable

UNI-4.0-SM

Fabric: Unidirectional

Raw Material: Uni – T-700 SC 12K 50C (Toray) – 97% of weight

3% Hot Melt Stabilizing Yarns on back of fabric – 3% of weight

Link to carbon fiber datasheet: <https://www.toraycma.com/page.php?id=661>

Fabric Width: 12"

Braid Angle: 0°

Braid Yield: 35.2 ft/lb (23.7 m/kg)

Areal Weight: 139 GSM

Layer Thickness (@55%FV): .006" (.15 mm)


Standard Fabric Tolerances

Yield Tolerance: +/- 5%

Angle Tolerance: +/- 3°

Standard Packaging on 6" Cores

Additional Quality Specifications available upon request

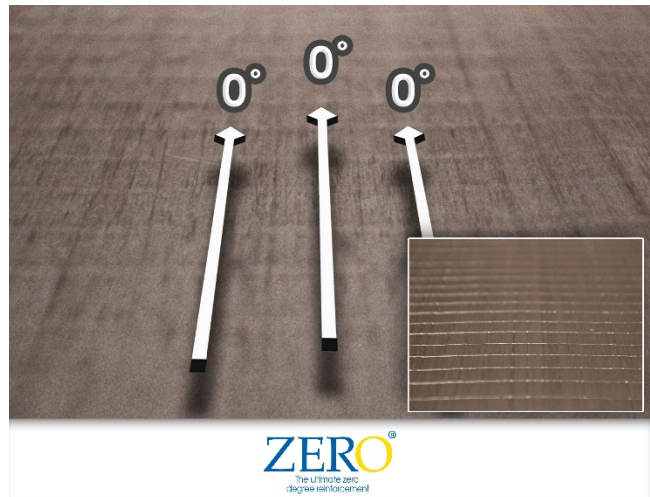

For more information, please visit www.braider.com, or contact a sales representative at sales@braider.com or 513-688-3200

All technical information and data contained herein is believed accurate and reliable. However, the accuracy and completeness of this information is not guaranteed and is subject to change without notice. A&P Technology shall not be liable for injury, loss or damage whether direct or consequential arising out of use of the data provided herein.